

# P160M

Pressurised-water temperature control unit up to 160 °C

- Control system RT200
- Pump with high flow rate: 100 l/min
- Low-scale cooling system "SK"
- Pressure control
- Leak-free pump with magnetic coupling
- Solid-state relay instead of heating contactor



## Technical specifications

Heat transfer medium	Outlet temperature	Heating capacity at 400V	Cooling capacity		Pump capacity/Type		
Water	160 °C	8 / 18 kW	150 °C	66 kW	SM73	60 l/min	1.0 kW
			150 °C	78 kW	SM75	90 l/min	1.5 kW
					PM75	85 l/min	2.2 kW

Technical data

<b>Outlet temperature</b>				
max.	°C	160		
<b>Heat transfer medium</b>		Water		
Filling quantity	l	1.9		
Expansion volume	l	-		
<b>Heating capacity at 400V</b>	kW	8 / 18		
<b>Cooling capacity</b>	kW	66	78	
Cooler		SK	2SK	
at outlet temperature	°C	150	150	
at cooling water temperature	°C	20	20	
<b>Pump capacity/Type</b>		SM73	SM75	PM75
Flow rate max.	l/min	60	90	85
Power consumption	kW	1.0	1.5	2.2
Pressure max.	bar	6.0	6.0	9.8
<b>Control system</b>		RT100 / RT200		
Measuring mode (standard)		Pt100		
<b>Operating voltage</b>	V/Hz	200-600 V, 50/60 Hz		
<b>Connections</b>				
Outlet/Inlet		G3/4"		
Cooling water mains		G1/2"		
<b>Degree of protection</b>		IP54		
<b>Dimensions W/H/D</b>	mm	295/711/914		
<b>Weight</b>	kg	84		
<b>Color</b>	RAL	9006/7016		
<b>Ambient temperature</b>				
max.	°C	40		
<b>Noise level</b>	db (A)	< 70		


## Standard equipment

- Solid-state relay (SSR) instead of heating contactor
- Filter in the main circuit
- Draining the consumer by suction
- Leak-free pump
- Patented low-scale cooling system (SK)
- Unit in IP54 protection degree
- RT200 control system


## Options

- Electronic flow measurement
- Hand valve in inlet and outlet
- Pump control
- Cleanroom version
- Pump PM75 only with frequency converter
- RT100 control system

## Pump curve

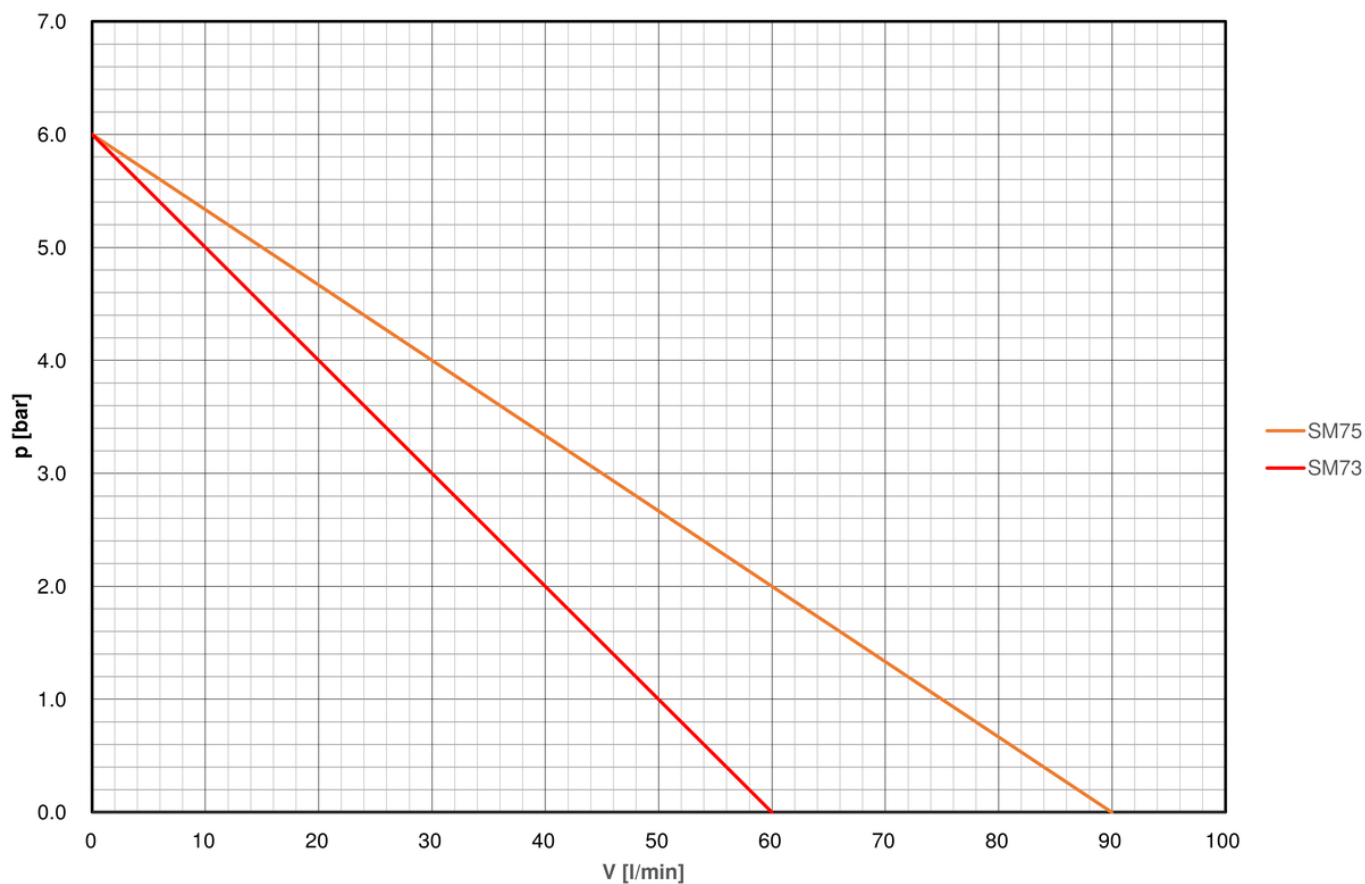

## Cooling curve

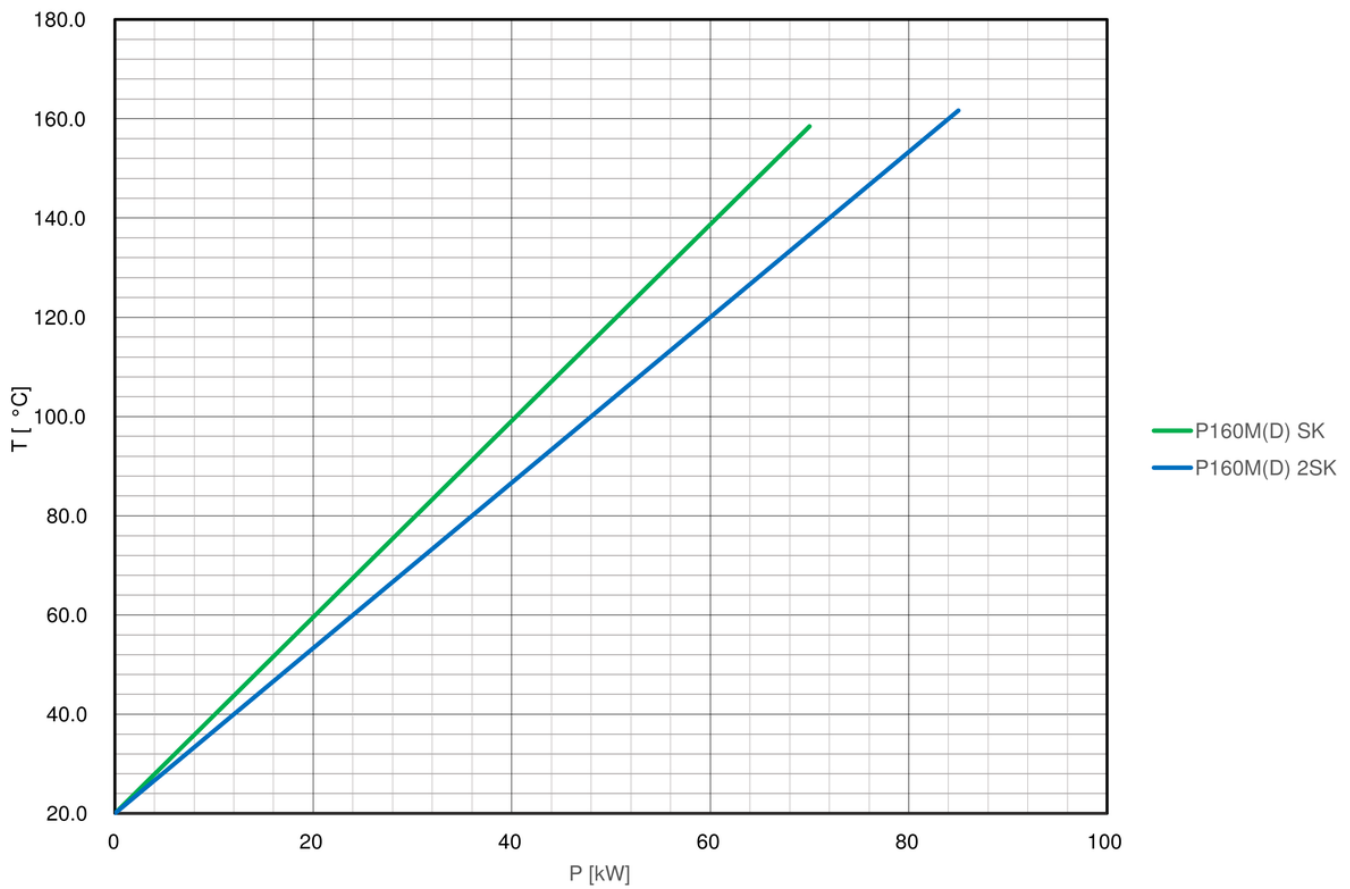

## Representation Switzerland

### Injection Molding, Die Casting, other Applications

Regloplas AG  
Spühlstrasse 6  
9016 St. Gallen  
Switzerland

Tel +41 71 282 58 00  
Email [info@regloplas.com](mailto:info@regloplas.com)