


multiFlow modular Injection moulding 120

The multi distributor system from REGLOPLAS is fully integrated into the control system of temperature control units with sensors, monitoring, displays and controllers. Each circuit is set and monitored individually.

- Water distribution system up to 120 °C
- 4 to 8 cooling channels per temperature control unit
- Flow per channel 1 l/min - 40 l/min
- Control system RT100 and RT200
- Integrated volume flow and temperature measurement per channel
- stand-alone option with RT200 control system

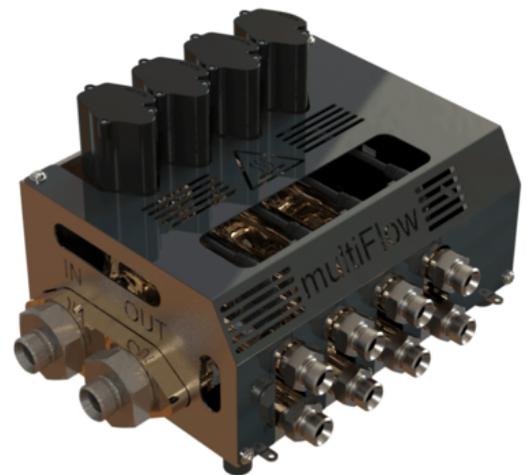

Technical specifications

Outlet temperature	Heat transfer medium	Number of channels	Flow measurements per channel (Typ)	Connections
120 °C	Water	4 / 8	1 - 18 (VFS) l/min 2 - 40 (VFS) l/min	G3/4" 60° Cone G1/2" 60° Cone

Technical data

Outlet temperature			
max.	°C	120	
Heat transfer medium		Water	
Number of channels		4 / 8	
Sensors			
Flow measurement per channel (Typ)	l/min	1 - 18 (VFS)	2 - 40 (VFS)
Temperature measurement per channel		PT100	
Models			
Cooling channels		4 / 8	
Direction of outgoing channels		to the right or the left	
Control system		RT100 / RT200	
Operating voltage	V/Hz	24V DC	
Connections			
Main connection temperature control unit		G3/4" 60° Cone	
Outlets to consumer		G1/2" 60° Cone	
Dimensions W/H/D			
4-fold	mm	260/209/361	
8-fold	mm	260/209/603	
Color	RAL	7016	
Ambient temperature			
max.	°C	40	

Standard equipment

- Profinet interface connection to temperature control unit

Options

- Stand-alone with control system RT200

Representation Switzerland

Injection Molding, Die Casting, other Applications

Regloplas AG
Spühlstrasse 6
9016 St. Gallen
Switzerland

Tel +41 71 282 58 00
Email info@regloplas.com