

P140S eMold

The efficient, energy-saving and compact pressurized-water temperature control unit with unmatched connectivity. Designed for plastic injection molding and industrial applications up to 140 °C

- Automatic energy-saving modes (Delta-T, flow control, pressure control)
- Most efficient, high-performance pump with variable pump speed (IE4, synchronous motor)
- RT200 controller with modern touch interface
- Maximum functionality and features included
- Unmatched RT200-connectivity
- Access through LAN, WLAN, web browser (HTML 5), TeamViewer
- OPC UA interface standard on all units
- Additional interface integrated
- New ESK-cooling with variable capacity
- Separated Cooling circuit (low calcification, long lifetime)
- Compact, robust, and field-proven design



Technical specifications

Heat transfer medium	Outlet temperature	Heating capacity at 400V	Cooling capacity		Pump capacity/Type		
			130 °C	68 kW	PM23	50 l/min	1.4 kW
Water	140 °C	8 kW					

Technical data

Outlet temperature		
max.	°C	140
Heat transfer medium		
Filling quantity	l	1.0
Expansion volume	l	-
Heating capacity at 400V		
	kW	8
Cooling capacity		
Cooler		2ESK
at outlet temperature	°C	130
at cooling water temperature	°C	20
Pump capacity/Type		
Flow rate max.	l/min	50
Power consumption	kW	1.4
Pressure max.	bar	9.0
Control system		
Measuring mode (standard)		Pt100
Operating voltage		
	V/Hz	400/ 50/60
Connections		
Outlet/Inlet		G1/2"
Cooling water mains		G1/2"
Degree of protection		
		IP54
Dimensions W/H/D		
	mm	225/590/862
Weight		
	kg	50
Color		
		Regloplas green/9005
Ambient temperature		
max.	°C	40
Noise level		
	db (A)	< 70


Standard equipment

- Solid-state relay (SSR) instead of heating contactor
- Filter in the main circuit
- Automatic water refill
- Leak-free pump with magnetic coupling
- Low-scaling and variable cooling system
- Direct access to control system via web-browser (HTML 5)
- Online software-update
- Unit in IP54 protection degree
- RT200 control system
- Flow meter VFS160 (inside)
- Timer (Timer function)
- Delta-T control
- Pressure control
- Flow control
- Connection cable 4m for backside unit
- Cascade control Inlet Sn3
- Flushing of unit
- Set point value ramp
- Draining the consumer by suction
- Vapor suppression
- Outlet pressure on Display
- Pump condition monitoring
- Interface OPC UA RT200 (WLAN/Ethernet)
- Ethernet RJ45 Service Interface
- One additional interface of your choice
- USB data logger


Options

- Manual valve in inlet and outlet
- multiFlow distributor
- Heating current monitoring
- RT100 control system

Pump curve

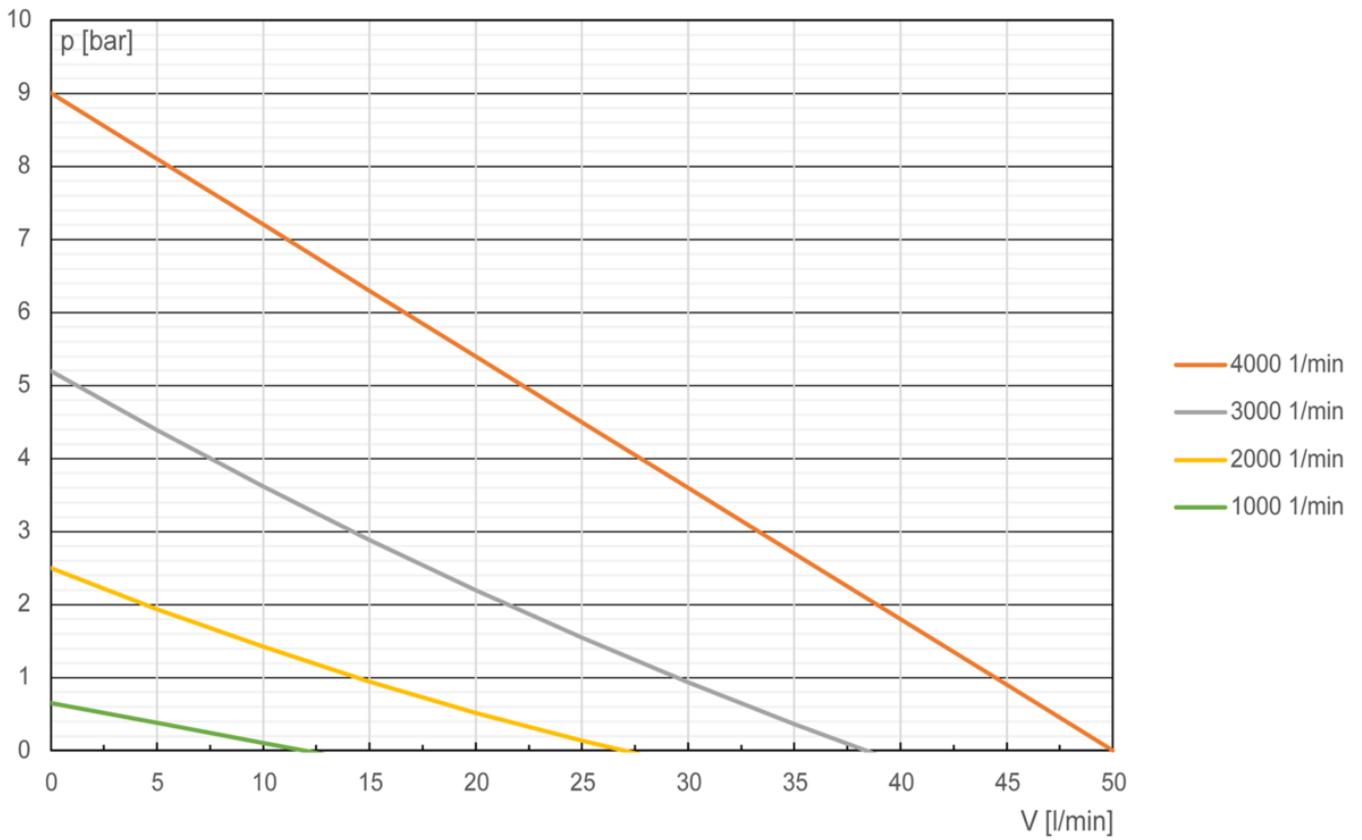

Cooling curve

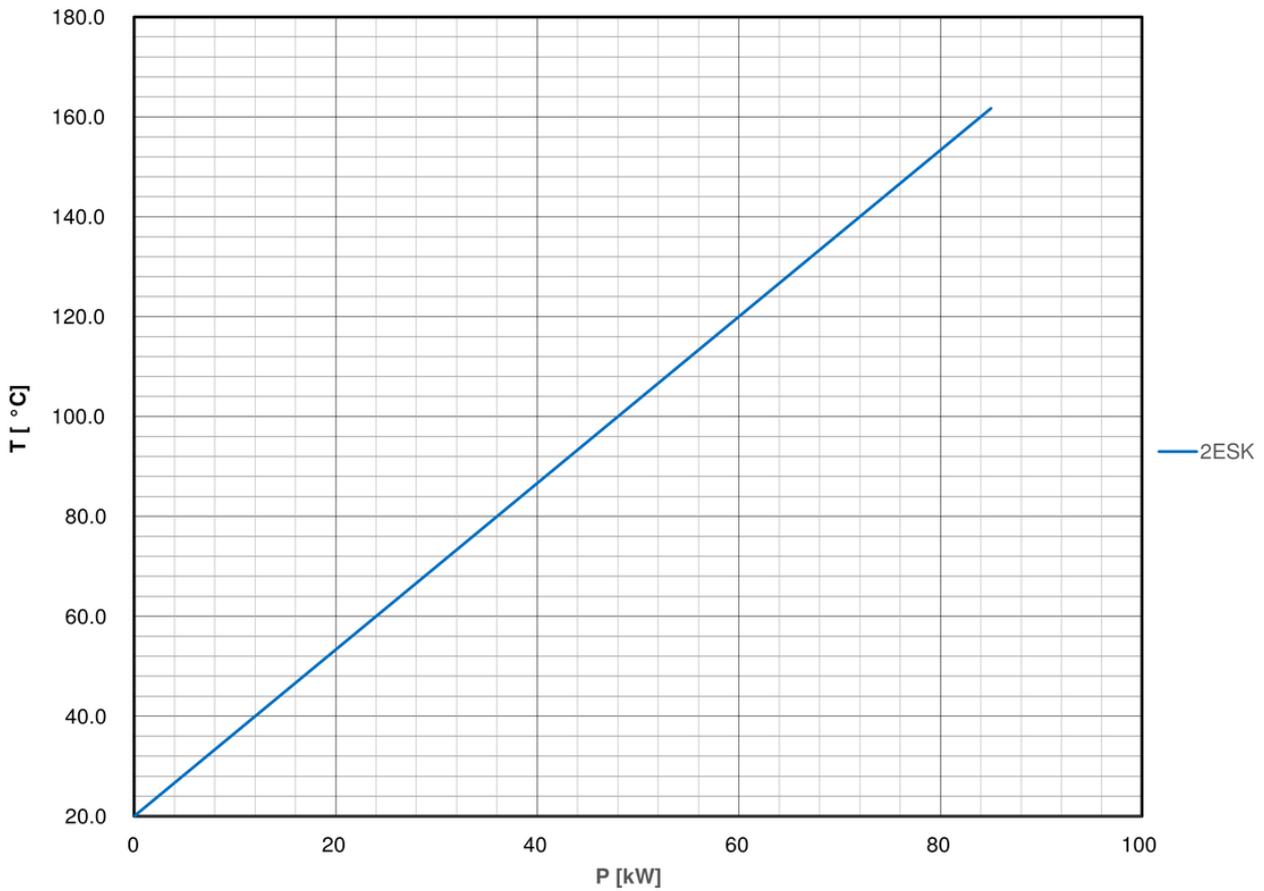

Representation Switzerland

Injection Molding, Die Casting, other Applications

Regloplas AG
 Spühlstrasse 6
 9016 St. Gallen
 Switzerland

Tel +41 71 282 58 00
 Email info@regloplas.com