

P140M

Pressurised-water temperature control unit up to 140 °C

- Control system RT200
- Pump with high flow rate: 60 l/min
- Low-scaling cooling system "SK"
- Pressure control
- Leak-free pump with magnetic coupling
- Solid-state relay instead of heating contactor



Technical specifications

Heat transfer medium	Outlet temperature	Heating capacity at 400V	Cooling capacity		Pump capacity/Type		
Water	140 °C	8 / 18 kW	130 °C	56 kW	SM73	60 l/min	1.0 kW
			130 °C	68 kW	SM75	90 l/min	1.5 kW
					PM75	85 l/min	2.2 kW

Technical data

Outlet temperature				
max.	°C	140		
Heat transfer medium		Water		
Filling quantity	l	1.9		
Expansion volume	l	-		
Heating capacity at 400V	kW	8 / 18		
Cooling capacity	kW	56	68	
Cooler		SK	2SK	
at outlet temperature	°C	130	130	
at cooling water temperature	°C	20	20	
Pump capacity/Type		SM73	SM75	PM75
Flow rate max.	l/min	60	90	85
Power consumption	kW	1.0	1.5	2.2
Pressure max.	bar	6.0	6.0	9.8
Control system		RT100 / RT200		
Measuring mode (standard)		Pt100		
Operating voltage	V/Hz	200-600 V, 50/60 Hz		
Connections				
Outlet/Inlet		G3/4"		
Cooling water mains		G1/2"		
Degree of protection		IP54		
Dimensions W/H/D	mm	295/711/914		
Weight	kg	84		
Color	RAL	9006/7016		
Ambient temperature				
max.	°C	40		
Noise level	db (A)	< 70		


Standard equipment

- Solid-state relay (SSR) instead of heating contactor
- Filter in the main circuit
- Leak-free pump
- Patented low-scale cooling system (SK)
- Unit in IP54 protection degree
- RT200 control system


Options

- Electronic flow measurement
- Hand valve in inlet and outlet
- Cleanroom version
- Pump PM75 only with frequency converter
- RT100 control system

Cooling curve

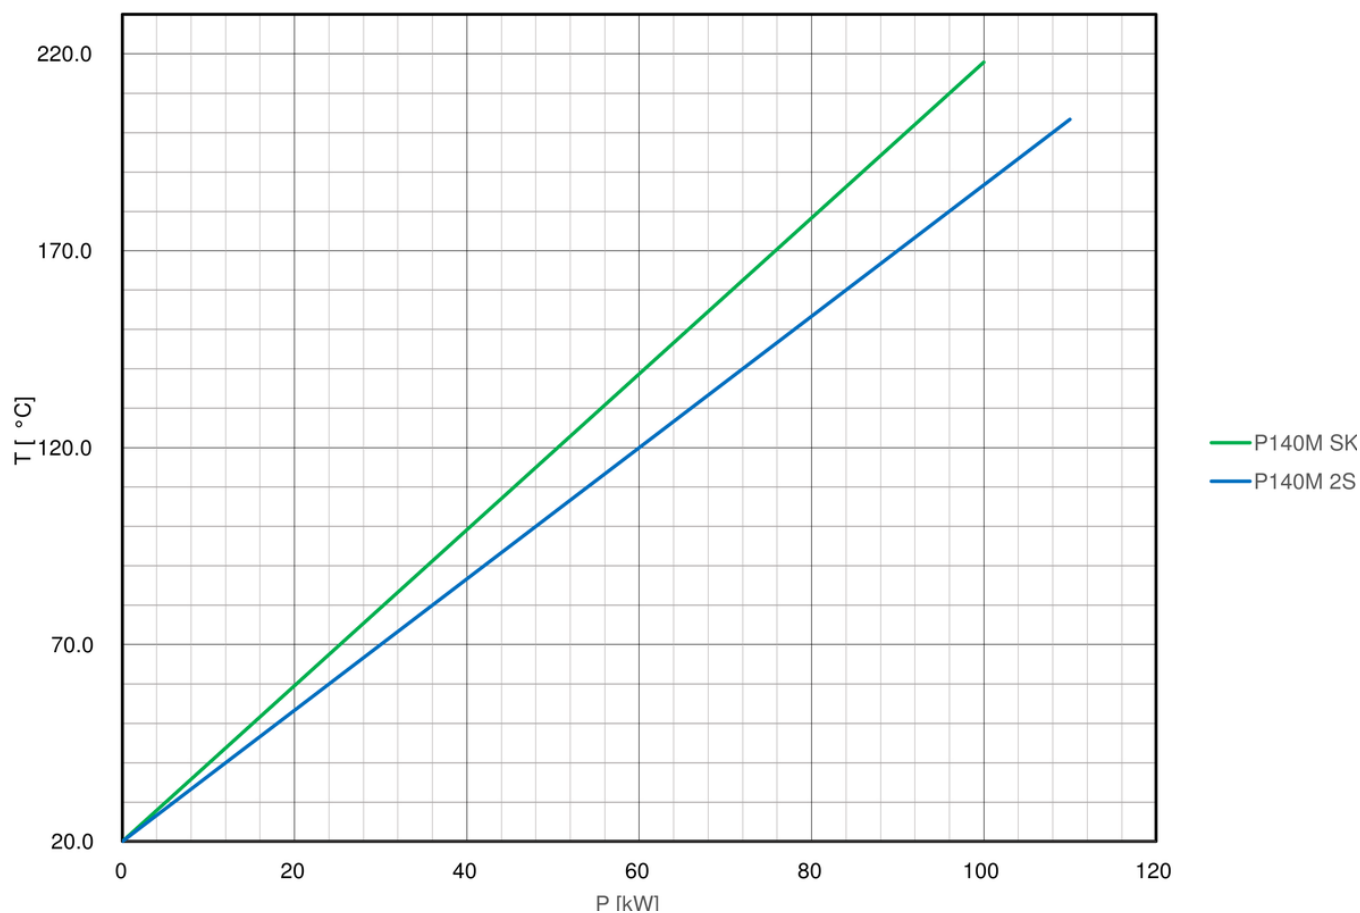

Pump curve

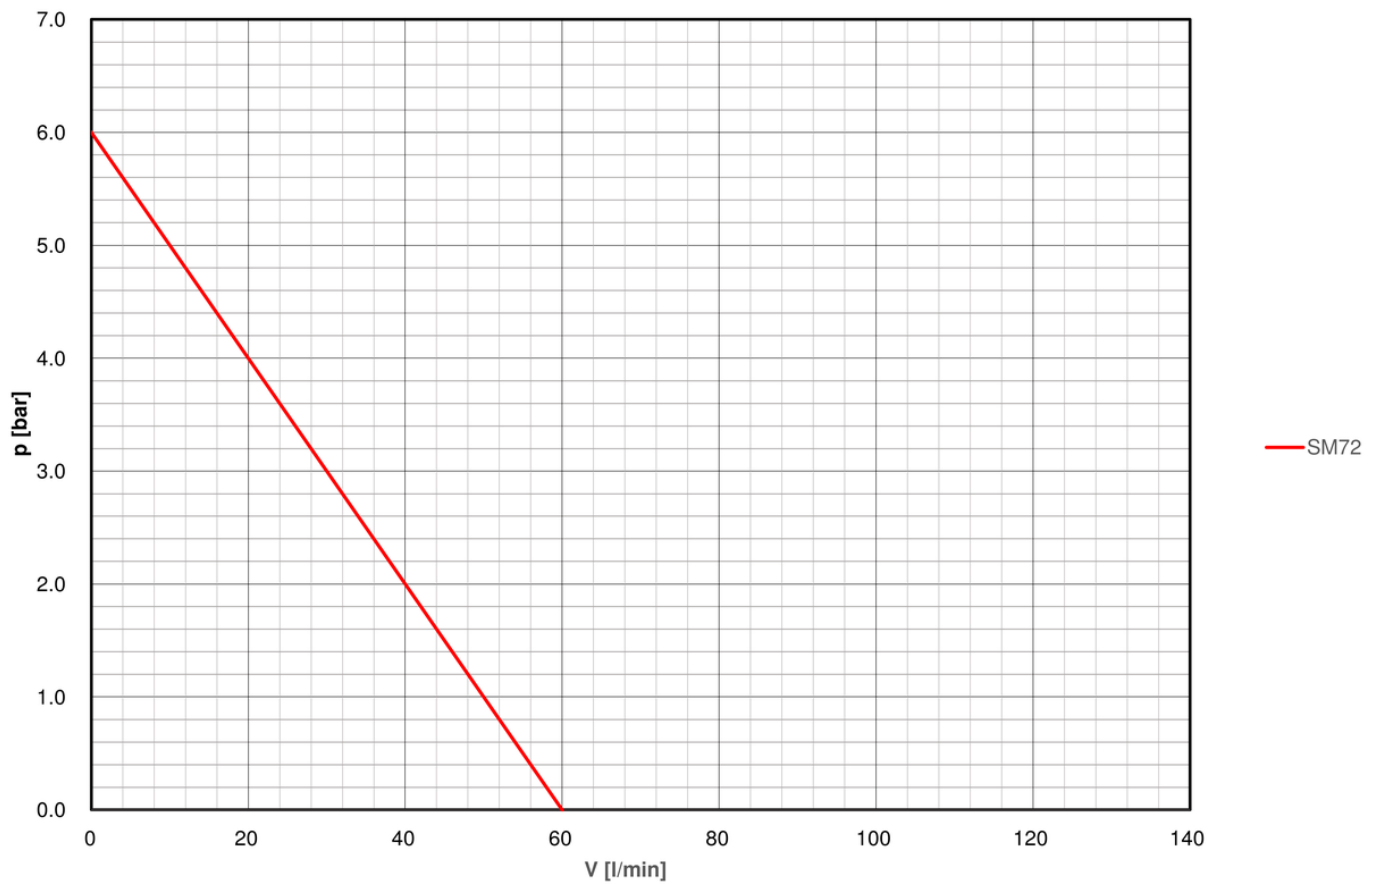

Representation Switzerland

Injection Molding, Die Casting, other Applications

Regloplas AG
 Spühlstrasse 6
 9016 St. Gallen
 Switzerland

Tel +41 71 282 58 00
 Email info@regloplas.com