

150

The temperature control unit for oil up to 150 °C and water up to 90 °C

- Control system RT200
- Pump with high flow rate: 70 l/min
- High cooling capacity



Technical specifications

Heat transfer medium		Outlet temperature		Heating capacity at 400V		Cooling capacity		Pump capacity/Type		
Water	Oil	90 °C	150 °C	6 / 12 / 18 kW	6 / 12 kW	140 °C	58 kW	TP20	60 l/min	0.5 kW
						140 °C	75 kW	TS22	70 l/min	0.92 kW

Technical data

Outlet temperature			
max.	°C	90	150
Heat transfer medium		Water	Oil
Filling quantity	l	17.6	17.6
Expansion volume	l	6.0	6.0
Heating capacity at 400V	kW	6 / 12 / 18	6 / 12
Cooling capacity	kW	58	75
Cooler		1K	2K
at outlet temperature	°C	140	140
at cooling water temperature	°C	20	20
Pump capacity/Type		TP20	TS22
Flow rate max.	l/min	60	70
Power consumption	kW	0.5	0.92
Pressure max.	bar	3.8	5.4
Control system		RT100 / RT200	
Measuring mode (standard)		Pt100	
Operating voltage	V/Hz	200-600 V, 50/60 Hz	
Connections			
Outlet/Inlet		G3/4"	
Cooling water mains		G1/2"	
Degree of protection		IP40	
Dimensions W/H/D	mm	346/690/728	
Weight	kg	78	
Color	RAL	7035/7024	
Ambient temperature			
max.	°C	40	
Noise level	db (A)	< 70	


Standard equipment

- Filter in cooling water circuit
- Leak-free pump
- Water circuit of non-rusting materials
- Solid-state relay (SSR) instead of heating contactor
- RT200 control system


Options

- Electronic flow measurement
- RT100 control system

Pump curve

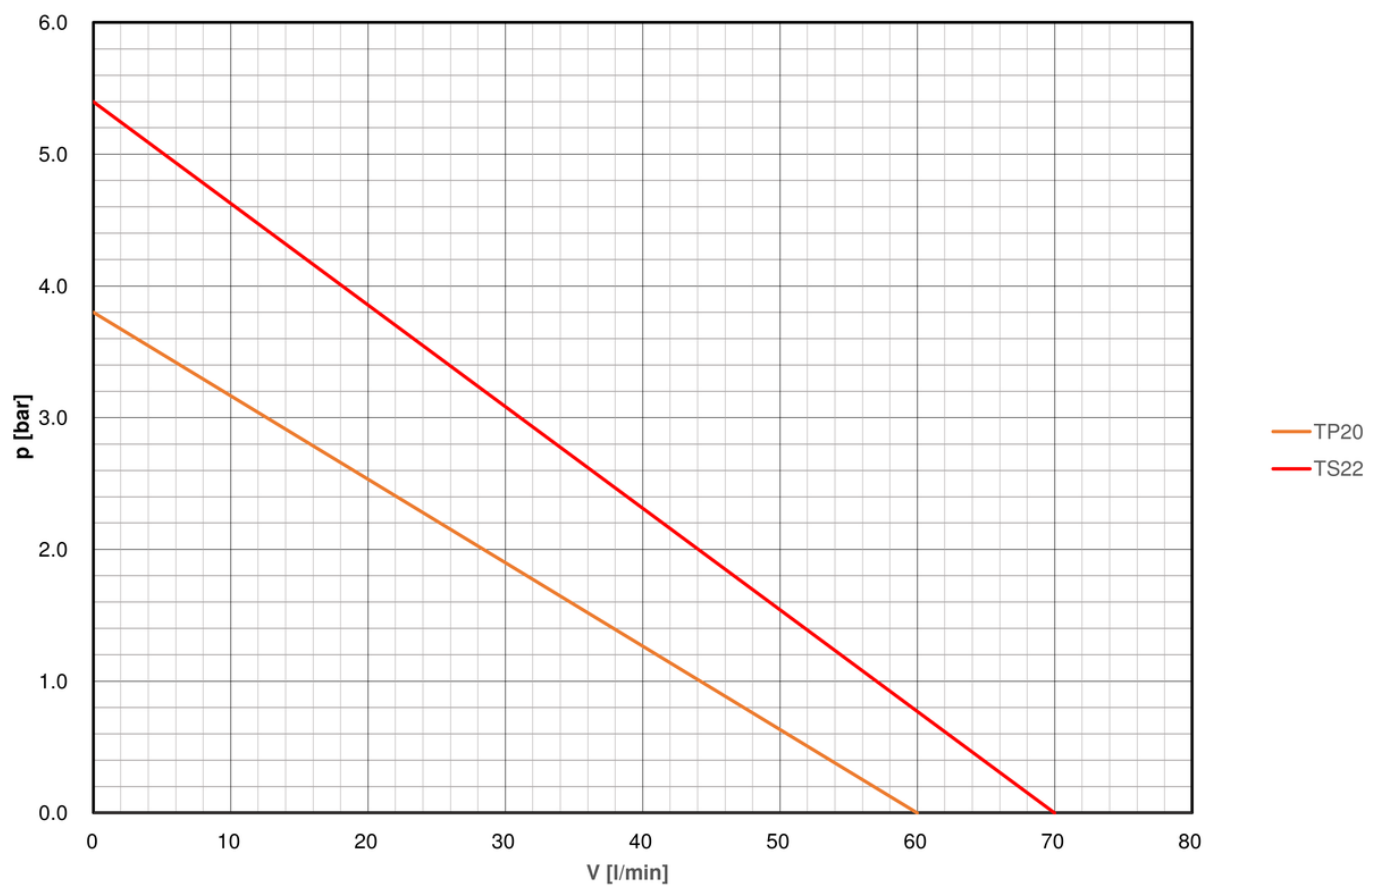

Cooling curve

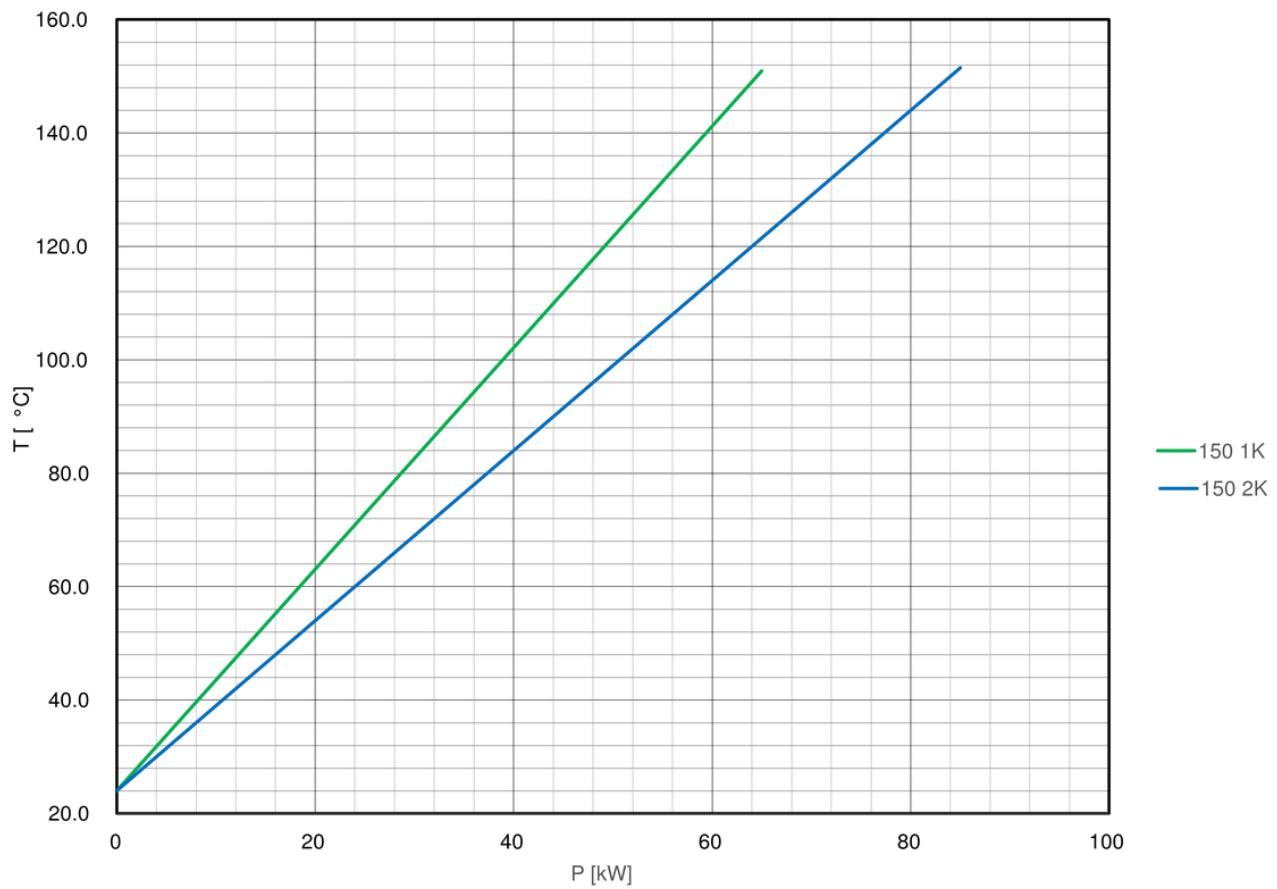

Representation Switzerland

Injection Molding, Die Casting, other Applications

Regloplas AG
 Spühlstrasse 6
 9016 St. Gallen
 Switzerland

Tel +41 71 282 58 00
 Email info@regloplas.com